

# Century

## Model G545

Vertical Indicator Post - Telescopic  
Adjustable and easy to use.




## Century Vertical Post Indicator

- Vertical Indicator Post to be used with Non Rising Stem (NRS) underground gate valves, sizes 14"~24" with integral reduction gear.
- Listed UL and FM 14"~24".
- Features a rotating indicator that is visible from a distance to show the valve's position, OPEN or SHUT, easily adjusted on site.
- Fusion-bonded coating in compliance with AWWA C550.
- UL Listed to UL 789 and FM 1110.



### Material List - CENTURY Vertical Indicator Post

PART NAME	Qty	MATERIAL	SPECIFICATION
Locking Wrench	1	Ductile Iron	A536 65-45-12
Operating Nut	1	Stainless Steel	SS 304 / ASTM B62
Hex nut screw	2	Steel	ASTM A105
Hex nut	2	Steel	ASTM A105
Snap Ring	1	Stainless Steel	AISI 066
Target carrier nut	1	Stainless Steel	SS 304 / ASTM B62
Target	4	Aluminum	ASTM B108
Hex cap Screw	4	Carbon Steel	ASTM A105
Window glass	2	Polycarbonate	LEXAN-UN
Window glass gasket	2	Teflon	PTFE
Hex cap screw	4	Carbon Steel	ASTM A105
Hex nut	4	Carbon Steel	ASTM A105
Body	1	Ductile Iron	A536 65-45-12
Hex cap screw	6	Carbon Steel	ASTM A105
Hex nut	6	Carbon Steel	ASTM A105
Base Flange	1	Ductile Iron	A536 65-45-12
Hex Cap Screw	4	Carbon Steel	ASTM A105
Hex Nut	4	Carbon Steel	ASTM A105
Crane Coupling	1	Ductile Iron	A536 65-45-12
Cotter Pin	1	Stainless Steel	AISI 304
Stand Pipe	1	Carbon Steel	ASTM A53
Stem	1	Carbon Steel	AISI 1045
Plug	1	Stainless Steel	AISI 304
Cover	1	Ductile Iron	A536 65-45-12
Cross Recessed Countersunk Head Screw	1	Stainless Steel	AISI 304
Locking Nose	1	Carbon Steel	ASTM 307B
Window Cover	2	Carbon Steel	ASTM 307B

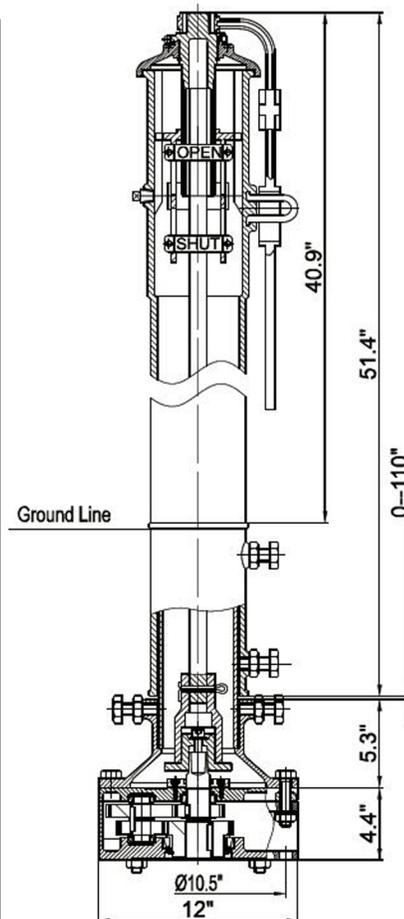

— Trench depth  
— Valve Size

[sales@centuryvalves.com](mailto:sales@centuryvalves.com)