

Century

Model 240-G

Fire Protection Butterfly Valve GROOVED
Manually Gear Operated with tamper Switch
Sizes valve 2"~12"




LISTED



APPROVED


Century Butterfly Valves

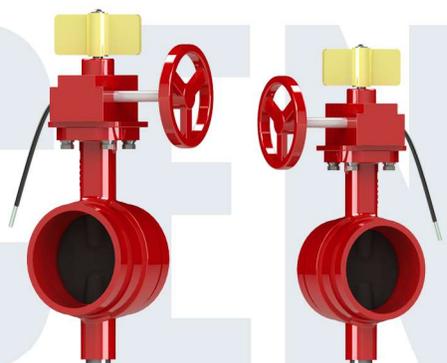

- Design Standard: MSS-SP-67
- Indicator with a flag style display
- Integrated control switch
- Minimal force required for operation
- Extended operation lifespan
- Grooved Dimensions per AWWA C606
- Top Flange to ISO 5211/1
- Fusion Bond Epoxy to suit AWWA C550 Standard
- Working Pressure: 2"~12" 300psi.
- Temperature -10°C to 120°C (14°F~248°F)
- Certified to UL1091 and FM1112

Dims in mm

Size	Part No	A	B	C	D	E Ø	Torque (300psi) (N.M)
2"	240-G-120	95	77	110	217	108	11
2 1/2"	240-G-125	98	80	110	216	108	15
3"	240-G-130	105	87	110	227	108	23
4"	240-G-140	135	108	110	p	108	40
6"	240-G-160	148	132	133	275	150	116
8"	240-G-180	165	144	133	292	150	204
10"	240-G-200	204	173	187	339	250	407
12"	240-G-220	245	187	187	380	250	583

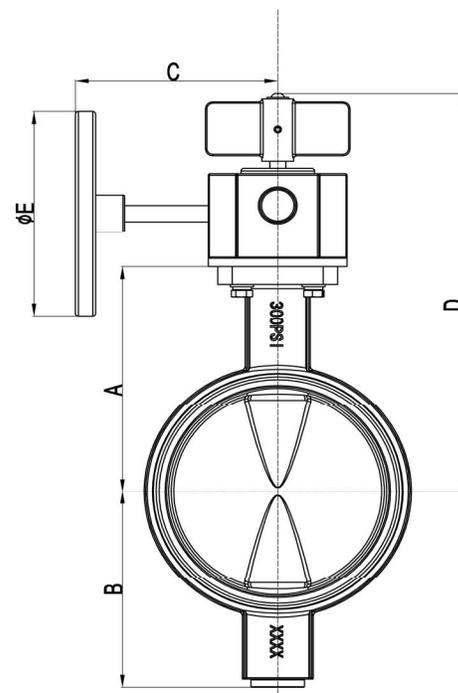

Material List - CENTURY Butterfly Valve - GROOVED

PART NAME	MATERIAL	SPECIFICATION
Body	Ductile Iron	A536 65-45-12
Stem Shaft	Stainless Steel	SS, AISI 431
Disc	Ductile Iron, EPDM Encapsulated	A536 65-45-12
Stem O rings	Rubber	EPDM
End Face Seal	Rubber	EPDM
Housing	Ductile Iron	A536 65-45-12
Cover	Cast Iron	ASTM A126 Class B
Worm	Carbon Steel	AISI, 1045
Worm Gear	Ductile Iron	A536 65-45-12
Handwheel	Ductile Iron	A536 65-45-12
Indicator	Ductile Iron	A536 65-45-12

sales@centuryvalves.com