

Century





Model 380

Fire Protection Y Strainer
Flange Ends and Grooved
Sizes 2"~12"

Century "Y" Strainer



- Flange dimensions per ANSI B16.1 Class 125
- Groove dimensions per AWWA C606
- Working Pressure: 2"~12" 300psi.
- Suitable for horizontal and vertical installation
- Fusion Bond Epoxy coated inside and out in accordance with AWWA C550 Standard
- Temperature -10°C to 120°C (14°F~248°F)
- Certified to UL321 for Fire Lines
- Certified to NSF/ANSI/CAN 61 and NSF/ANSI 372

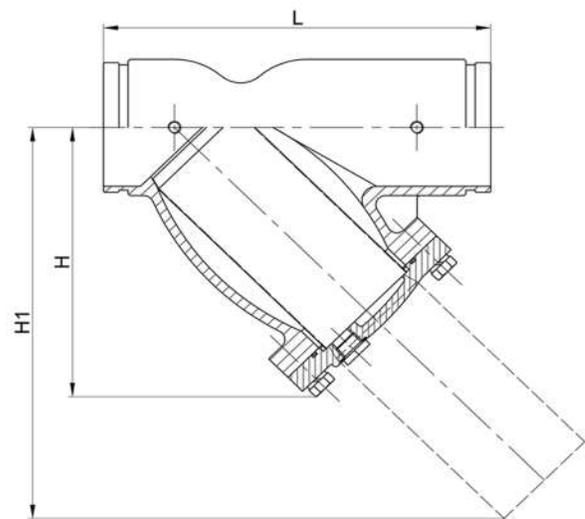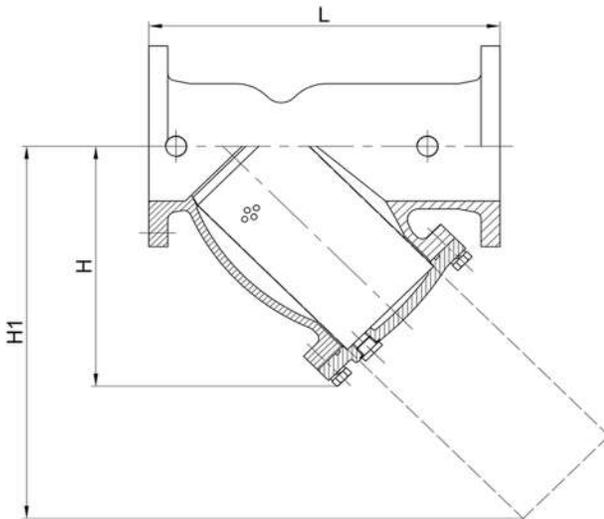

Material List - CENTURY Y Strainer

PART NAME	MATERIAL	SPECIFICATION
Body	Ductile Iron	A536 65-45-12
Bolt	Galvanized Carbon Steel	Gr8.8
Washer	Galvanized Carbon Steel	Gr8.8
Cover	Ductile Iron	A536 65-45-12
Screen	Stainelss Steel	AISI SS304
Plug	Galvanized Carbon Steel	Gr8.8
O Ring	Rubber	EPDM
Test Screw	Steel	ASTM B16

Dimensions (mm)

Size	H	H1	L
2"	130	195	230
2 1/2"	158	240	254
3"	175	270	260
4"	202	320	308
6"	334	495	471.4
8"	391	570	549.4
10"	460	700	654
12"	590	840	762

sales@centuryvalves.com